

# Multi-domain Modeling and Simulation of a Linear Actuation System

*Deepika Devarajan, Scott Stanton, Birgit Knorr*

**Ansoft Corporation**



# Outline

- ◆ Introduction
- ◆ Multi-domain Modeling of a Linear Actuation System
  - ◆ Top-level schematic
  - ◆ Modeling systems belonging to different domains
- ◆ Modeling Approaches of Solenoid
  - ◆ Behavioral VHDL-AMS
  - ◆ Table look-up model
  - ◆ Comparison of simulation characteristics
- ◆ Discussion and Conclusions

# Introduction



- ◆ System Design in the Automotive Industry
  - ◆ Mixed-signal multi-domain systems
  - ◆ Previously proprietary languages used for component and system modeling
  - ◆ Dependent on simulation tool vendors
- ◆ Standardization of VHDL-AMS
  - ◆ Choice of simulation tools
  - ◆ Easy model delivery from suppliers to OEMs
  - ◆ Large community of model developers

# Multi-domain Modeling

- ◆ Linear Actuation System

- ◆ Domains

- ◆ Electrical
    - ◆ Mechanical
    - ◆ Hydraulic
    - ◆ Digital control

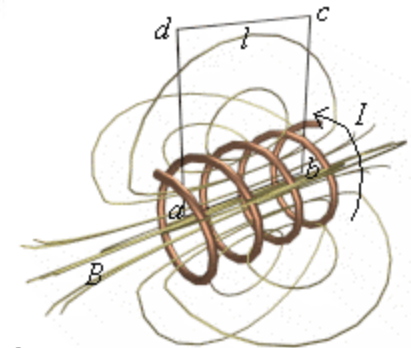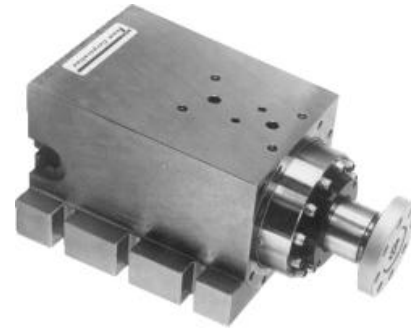

- ◆ Solenoid

- ◆ Interfaces electrical and mechanical domains
  - ◆ Complex electromagnetic principles




Solenoid pictures sources:

[http://www.univ-mlv.fr/enseignement/cours/sctechno/s2\\_chap2/solenoid.gif](http://www.univ-mlv.fr/enseignement/cours/sctechno/s2_chap2/solenoid.gif)

<http://www.tecalemit.co.uk/solenoids.html>

[http://www.teamcorporation.com/team2002/lin\\_act.html](http://www.teamcorporation.com/team2002/lin_act.html)

# Linear Actuation System

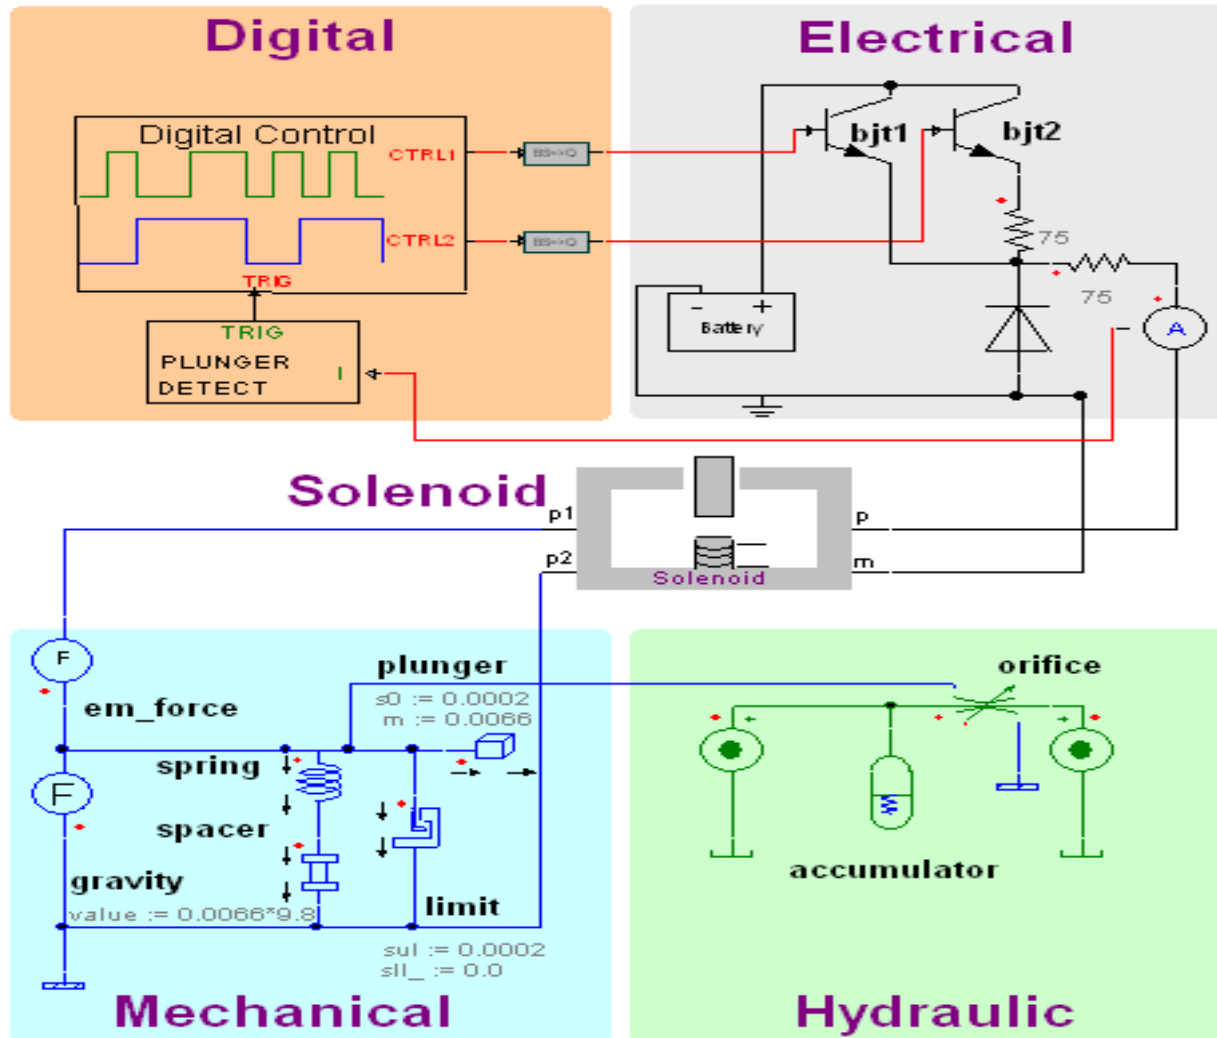

# Modeling Approaches

- ◆ Constant Lumped Inductance Value
  - ◆ Behavioral VHDL-AMS model
  - ◆ Derive inductance parameter
    - ◆ Hand calculations
    - ◆ Output from finite element analysis tool
  - ◆ Low accuracy
- ◆ Non-linear Inductance Value
  - ◆ State space model
  - ◆ Table look-up
    - ◆ Multi-dimensional table model implemented as internal component
    - ◆ Limited support in VHDL-AMS
  - ◆ Better accuracy because inductance changes with coil current and plunger position

# Behavioral VHDL-AMS Model

$$L_{\max} = N^2 * L_0$$

$$L(x) = \frac{L_{\max}}{1 + Kx}$$

$$F_k = \frac{K}{2 * L_{\max}}$$

$$\phi = L(x) * i$$

$$v = \frac{\partial \phi}{\partial t}$$

$$F = \phi^2 * F_k$$

$N$  = Number of coil turns

$K$  = Inductance coefficient

$x$  = Plunger position, m

$L_0$  = Max inductance value/turn at min air gap, H

$L(x)$  = Instantaneous inductance value at  $x$ , H

$L_{\max}$  = Max inductance for all turns, H

$F_k$  = Force at max inductance for given  $K$ ,  $N$

$\phi$  = Instantaneous flux through solenoid, Wb

$i$  = Current through solenoid, A

$v$  = Voltage across solenoid, V

$F$  = Force output from solenoid, N

# Behavioral VHDL-AMS Model (2)

```
LIBRARY IEEE;
USE IEEE.ELECTRICAL_SYSTEMS.ALL;
USE IEEE.MECHANICAL_SYSTEMS.ALL;

ENTITY solenoid IS
  GENERIC (
    LO : REAL := 4.05e-7;
    K : REAL := 6328.0;
    N : REAL := 1500.0);
  PORT (
    TERMINAL p,m : ELECTRICAL;
    TERMINAL pos1, pos2 : TRANSLATIONAL);
END ENTITY solenoid;
```

```
ARCHITECTURE behav OF solenoid IS
  CONSTANT Lmax : REAL := LO * N * N;
  CONSTANT Fk : REAL := K / (2.0 * Lmax);
  QUANTITY v ACROSS i THROUGH p TO m;
  QUANTITY position ACROSS force THROUGH pos1 TO pos2;
  QUANTITY L, flux : REAL;
BEGIN
  IF (position > 0.0) USE
    L == Lmax / (1.0 + K * position);
  ELSE
    L == Lmax;
  END USE;
  flux == L * i;
  v == flux'dot;
  force == flux * flux * Fk;
END ARCHITECTURE behav;
```

# Hand Calculation

$$L_0 = \frac{\mu N^2 A}{l}$$

$\mu = \mu_0 \mu_r$  = Permeability of medium, H/m

$N$  = Number of turns of solenoid

$A$  = Cross-sectional area of solenoid, m<sup>2</sup>

$l$  = Length of solenoid, m

- ◆ Uses classical equation for solenoid inductance
- ◆ Assumption
  - ◆ Permeability of medium is constant
  - ◆ Solenoid is very long
    - ◆ Does not include fringing effects

$$\mu_0 = 4\pi \times 10^{-7} \text{ H/m}$$

$$\mu_r = 800$$


$$N = 1 \text{ turn}$$

$$A = 1.2 \times 10^{-5} \text{ m}^2$$

$$l = 1.5 \times 10^{-2} \text{ m}$$

$$L_0 = 0.8 \text{ } \mu\text{H}$$

# FEA Calculation

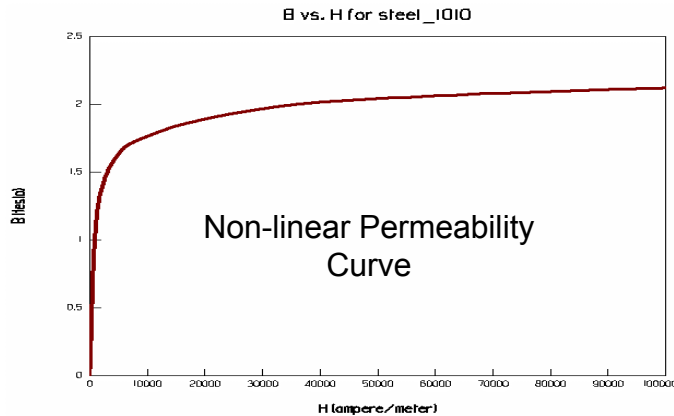


Cross section of the Solenoid

- ◆ In reality
  - ◆ The  $L_0$  value depends on the permeability  $\mu$
- ◆ The permeability varies
  - ◆ Spatially
  - ◆ Temporally
- ◆ FEA considers
  - ◆ Exact geometry of structure
  - ◆ Non-linear material definition
- ◆ By solving a static magnetic field problem we arrive at:


$$L_0 = 0.405 \mu\text{H}$$

# Non-linear Table Look-up Model

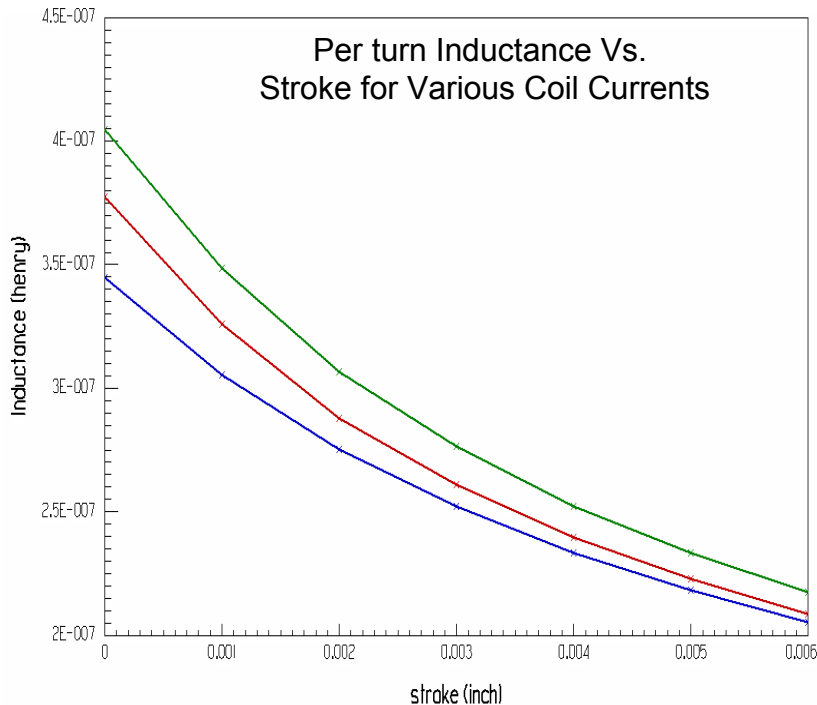


- ◆ Inductance varies non-linearly with
  - ◆ Coil current
  - ◆ Stroke (position)
- ◆ Parametric FEA analysis
  - ◆ Series of magnetostatic solutions
  - ◆ Assemble values in a table for look-up

# Non-linear Table Look-up Model (2)

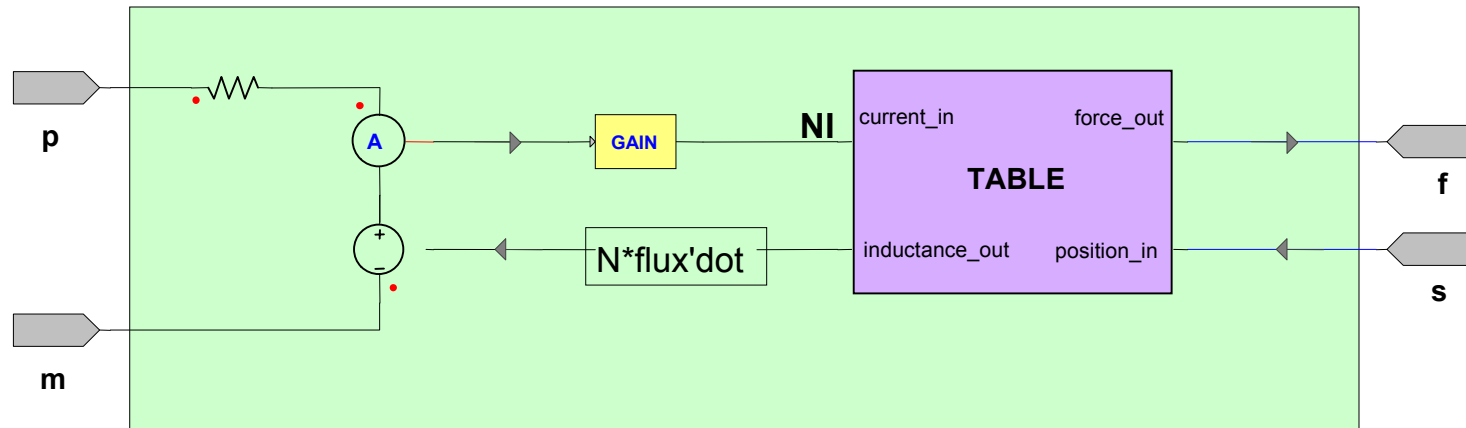


- ◆ Table look-up Model
  - ◆ Inputs
    - ◆ Coil current
    - ◆ Stroke
  - ◆ Outputs
    - ◆ Force
    - ◆ Inductance
- ◆ Implemented in SIMPLORER®
- ◆ No direct support in VHDL-AMS
  - ◆ Can be implemented indirectly

# Simulation Characteristics

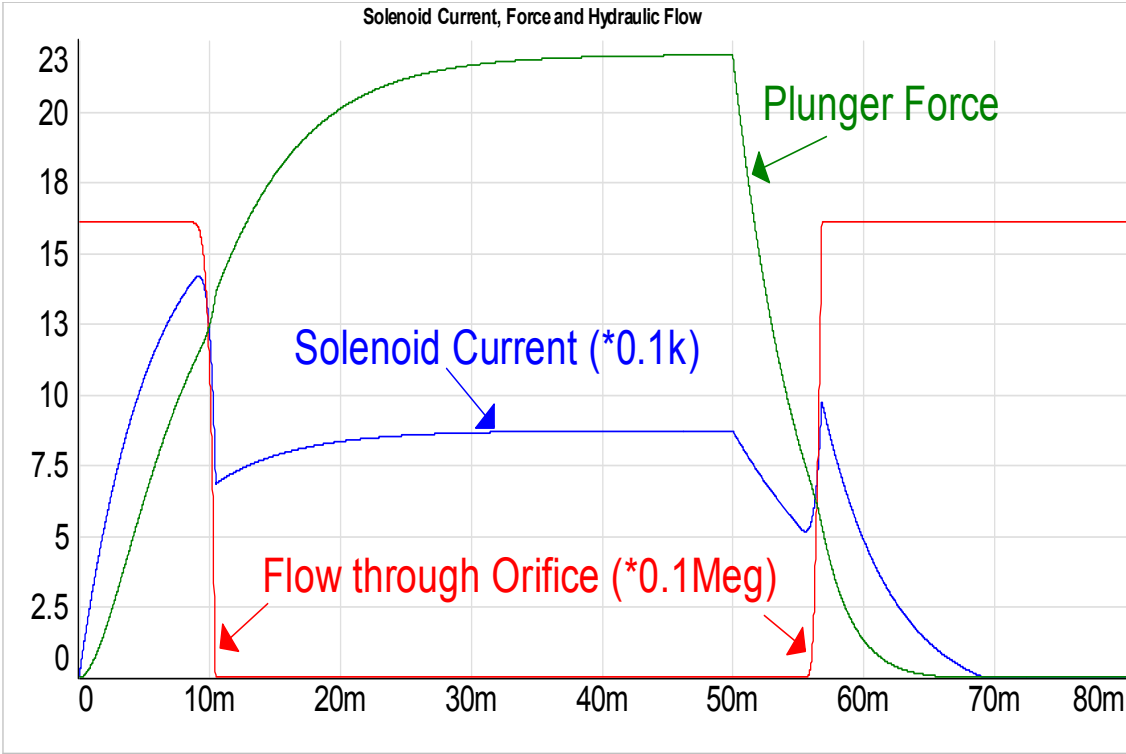

Solenoid Current, Force, and Hydraulic Flow

# Comparison

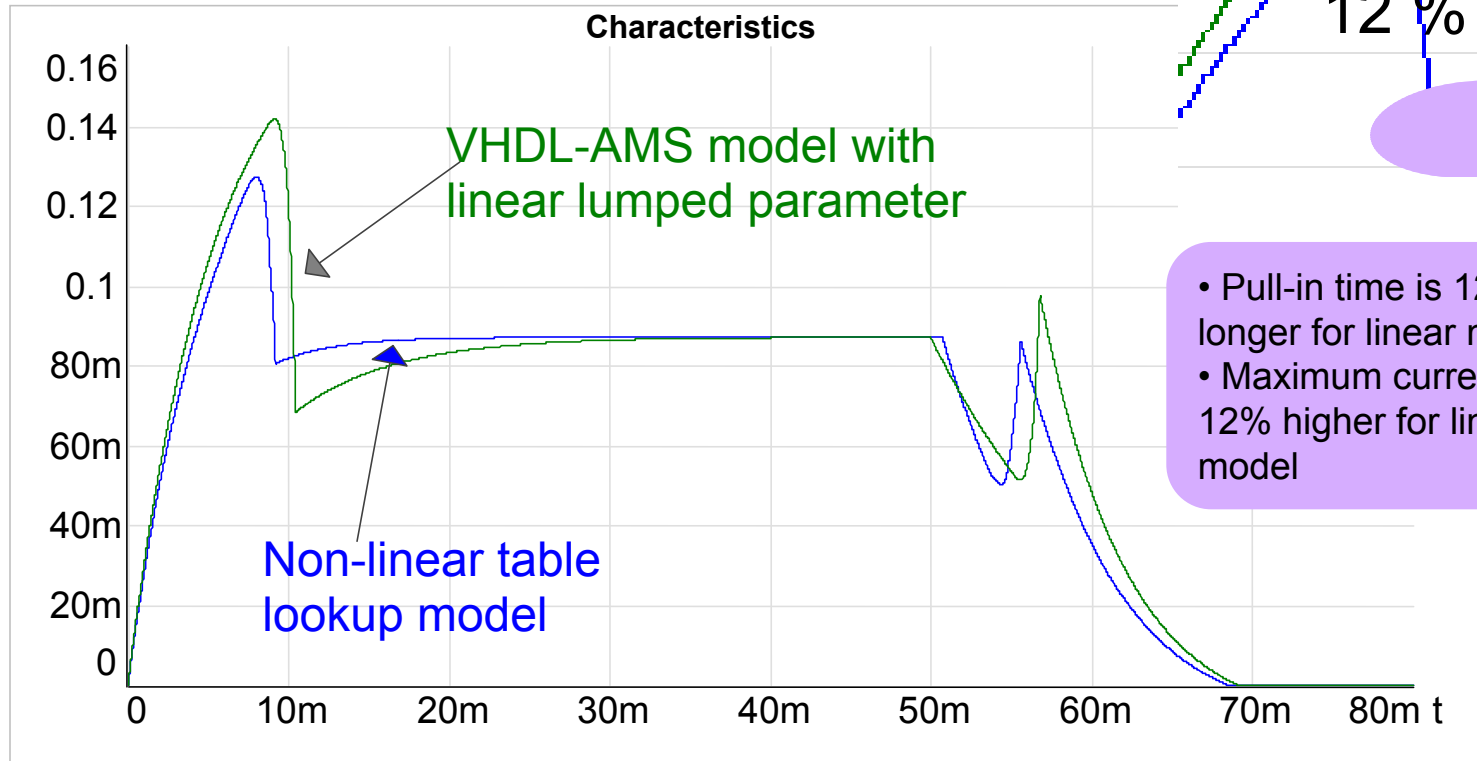

Comparison of Solenoid Current Characteristics

# Language Extension


- ◆ Currently Possible with Separate Package
  - ◆ User defined table datatypes for look-up
  - ◆ Interpolation functions for data in the table
- ◆ Disadvantages
  - ◆ Implementation at the language level
  - ◆ Interpolation functions not optimized for individual simulators
  - ◆ Large simulation times
- ◆ Suggested Approach
  - ◆ Standardize table element and functions in VHDL-AMS
  - ◆ Individual vendors can include optimized functionality in their tools

# Conclusions

- ◆ VHDL-AMS is suitable for multi-domain mixed-signal automotive applications
- ◆ Multi-domain linear actuation system was examined
- ◆ Non-linear solenoid modeling approaches were discussed
- ◆ VHDL-AMS language extension suggested
  - ◆ Standardized table element and associated functions


# Solenoid Action

Plunger Out

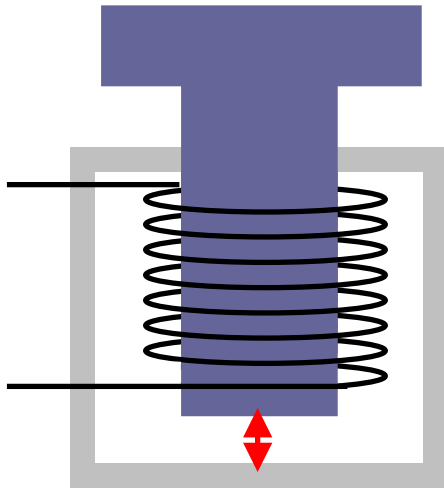

Long Air Gap

Plunger Attracted In

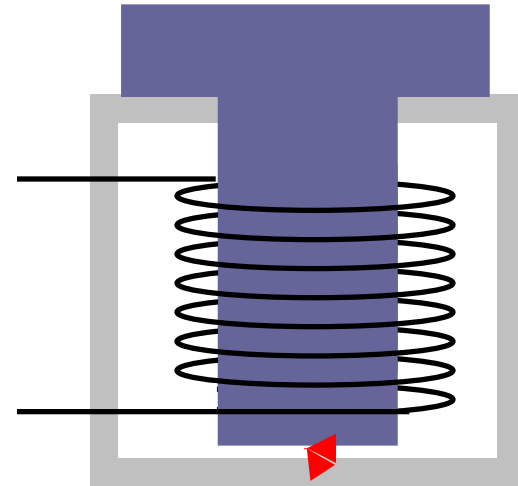

No Air Gap

- ◆ Challenging
- ◆ Multi-domain component
- ◆ Electromagnetic principles